

ik

TINTING
WINDOW
& PPF



HEAVY DUTY SPRAYER

Paint Protection Film
Window Tinting
Wrapping



www.iksprayers.com



Max 13 L / 3,5 Gal

IK WINDOW TINTING & PPF



"Versatile Professional 13L Stainless Steel Sprayer especially designed for the installation of protection films.

Its ergonomic design ensures optimal comfort and control during installation tasks, reducing operator fatigue and enhancing efficiency.

Built from premium-grade materials, such as corrosion-resistant tank and pump, and high-density polypropylene shut-off valve to avoid accidental damages to the bodywork.

Its precision-engineered nozzles, adjustable nozzle for fine mist or jet spray, enable uniform coverage and controlled droplet size.

Equipped with a chemical resistant coil hose (standard commercial hose also available), pressure gauge & safety release valve.

Removable components facilitate quick cleaning and maintenance, and the availability of spare-parts ensures a prolonged lifespan and trouble-free operation.

3 ways to pressurize the unit: manually, by using an external air compressor or by using the IK battery powered compressor.

Whether you're a professional automotive detailer, a car dealership, or a DIY enthusiast, the IK PPF Window Tinting Professional Sprayer empowers you to achieve superior results with confidence".



Adjustable conical nozzle



Fan nozzle

Power-up your PPF with optional accessories

- 18V Battery Compressor



- 62 cm Compressed air hose



IK WINDOW TINTING & PPF

IK WINDOW TINTING & PPF

VALVE:	6 bar
STANDARD NOZZLES:	Adjustable conical nozzle and fan
TOTAL CAPACITY:	15 L
USABLE CAPACITY:	13 L
GROSS WEIGHT:	5.5 Kg
NET WEIGHT:	5 Kg
REFERENCE:	83371

6 meter standard hose available






Adjustable cone nozzle for fine mist or straight jet spraying. High density shut-off valve.



Even fan nozzle for wider spraying. High density shut-off valve.



Plastic handle with a placing support.

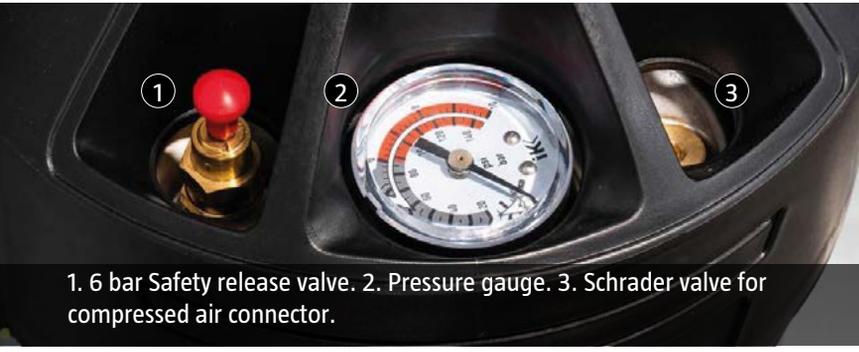

1. 6 bar Safety release valve. 2. Pressure gauge. 3. Schrader valve for compressed air connector.



4.5 m chemical resistant hose. (6 meter standard hose available)




Stable base with foot support while pumping action.



Premium-grade corrosion free Stainless-Steel tank and pump.



Fastening parking place for the handle.

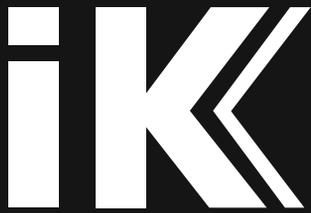

**BY EXPERTS
FOR EXPERTS**



Antigua 4
Antzuola 20577
Gipuzkoa (Spain)
www.iksprayers.com

Ph: (+34) 943786000
Email: iksprayers@goizper.com

Goizper UK | Goizper Spain | Goizper Portugal | Goizper France | Goizper Central Europe | Goizper North America | Goizper El Salvador |
Goizper Brazil | Goizper Middle East | Goizper Asia | Goizper West Africa | Goizper East Africa |

GOIZPER S. Coop. reserves the right to change the contents and information of the products shown in this catalogue without prior notice. © GOIZPER S. Coop. all rights reserved. The reproduction in whole or in part of the contents, text and/or images of this catalogue is strictly prohibited.

www.iksprayers.com